



SVService - Ledwall P 3.91Curve – Indoor Designed for Creative Stage



Light Weight



Fast Assembly



Curve Design



Anti-damage Design





Mixed splicing



Tidy Cabinet Design

CREATIVE STAGE DESIGN

- High accuracy arc lock design delivers a gap-free connection and creates various innovative stage

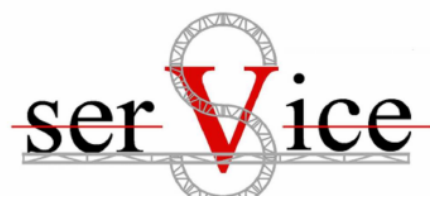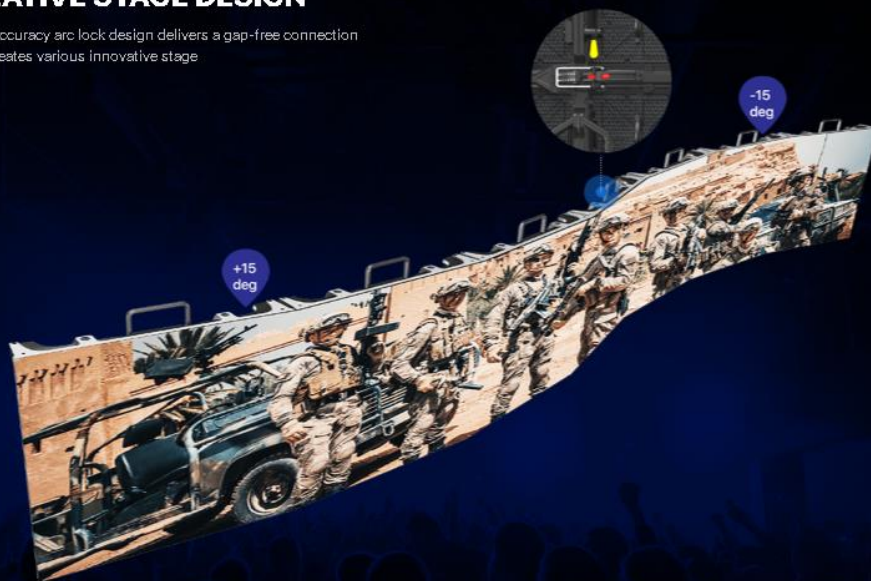

SVService SRL - Viserba di Rimini (RN)


site: www.svservice.net email svservice@libero.it



MUTUAL ASSEMBLY

500*500mm and 500*1000mm Cabinet can up-down mutual assembly. It reaches the demand for various demision of the display



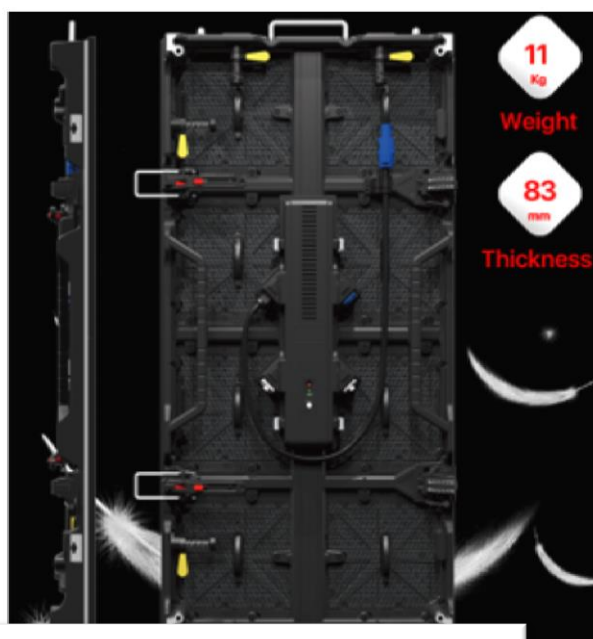

Specifications

Product	391
Pixel Pitch (mm)	3.91
Cabinet size (W*H/mm)	500×500 500×1000
Cabinet Weight	7/11
Brightness (Nit)	800
Refresh Rate (Hz)	≥1920
Gray Scale (Bit)	14
IP Rating (Front/Rear)	IP40/IP21
Avg Power Consumption (W/m ²)	128
Curve	±15°



Epoch-Making Creative Design Multiple Application Effects Possible

High price-quality ratio for indoor rental application, which can replace the 500*500mm cabinet to be used at show, conference, exhibition, wedding, opening ceremony and promotion activity for stage background with light&sound equipment.

Series Product Parameters

Model	Pixel Pitch	Brightness (nit)	Dimensions (mm)	Refresh Rate(Hz)	Gray Scale	Protection Grade	Weight
M1-391	3.91	1200	500×1000	≤2500	14(bit)	IP40/IP21	11.5KG
M1-481	4.81	1500	500×1000	≤2500	14(bit)	IP40/IP21	11.5KG

Comparison Between Products and Traditional Die Casting Products


	Dicolor's die casting cabinet	Traditional die casting cabinet	Comparison result
Configuration (Per SQM)			
Connector	4 pairs	8 pairs	Easy installation
Flight case	1 for 6pcs 3sqm	1 for 6pcs 1.5sqm	save logistic cost by 25% save storage space by 25% save installation time by 50%
Structure connector	8 sets	8 sets	Reduce operation time by 50%
Cabinet	2 pcs/m ²	4 pcs/m ²	Reduce operation time by 50%
Control card	2 pcs/m ²	4 pcs/m ²	Reduce operation time by 50% and improve stability by 200%
Module	8 pcs/m ²	16 pcs/m ²	Reduce operation time by 50% Improve stability by 200% Less maintenance costs
Screw	Reduce operation time by 10%-25%		
Features			
Weight	23kg/m ²	36kg/m ²	Lighter than traditional die casting cabinet
Thickness	79.5mm	Above 85mm	Save space, logistic cost and storage
Precision	Good	Good	Tie
Stability	Good	Good	Tie




Cabinet edge protection design, improved product stability

Height of the cabinet is higher than modules', which can protect the edge of the modules so it can protect the mask and led lamp to improve the stability.



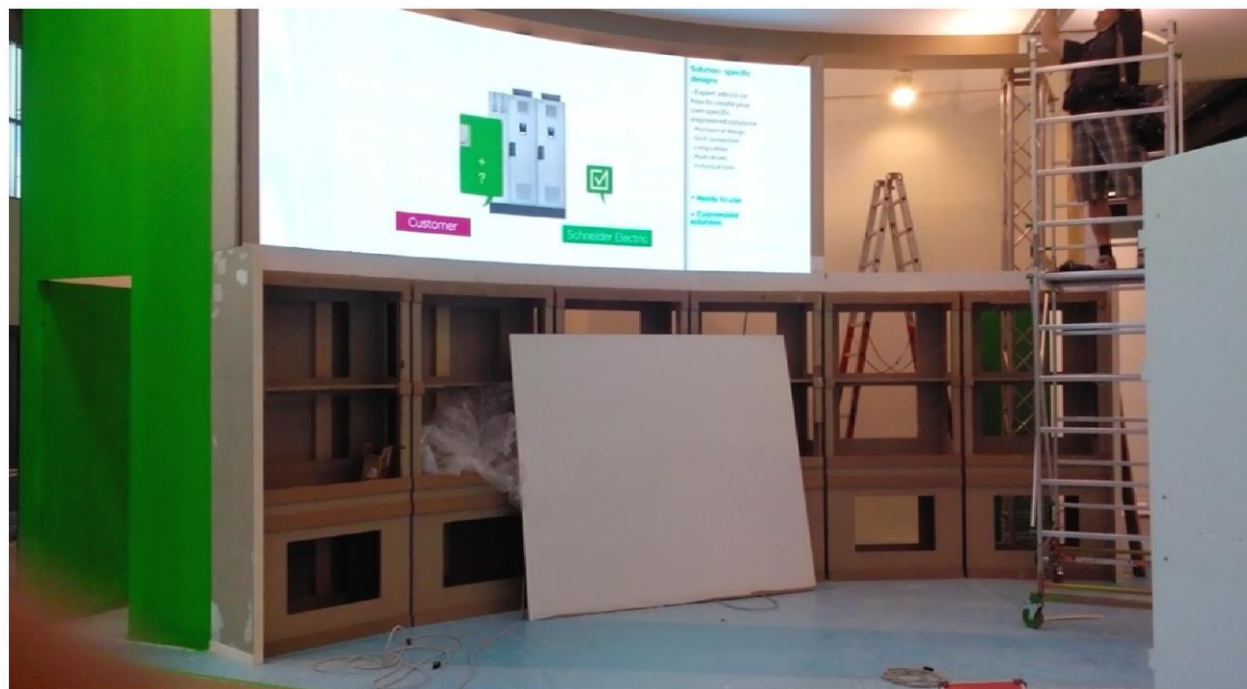

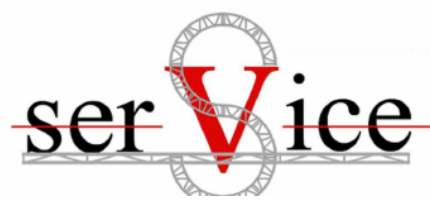

SVService SRL - Viserba di Rimini (RN)

site: www.svservice.net email svservice@libero.it